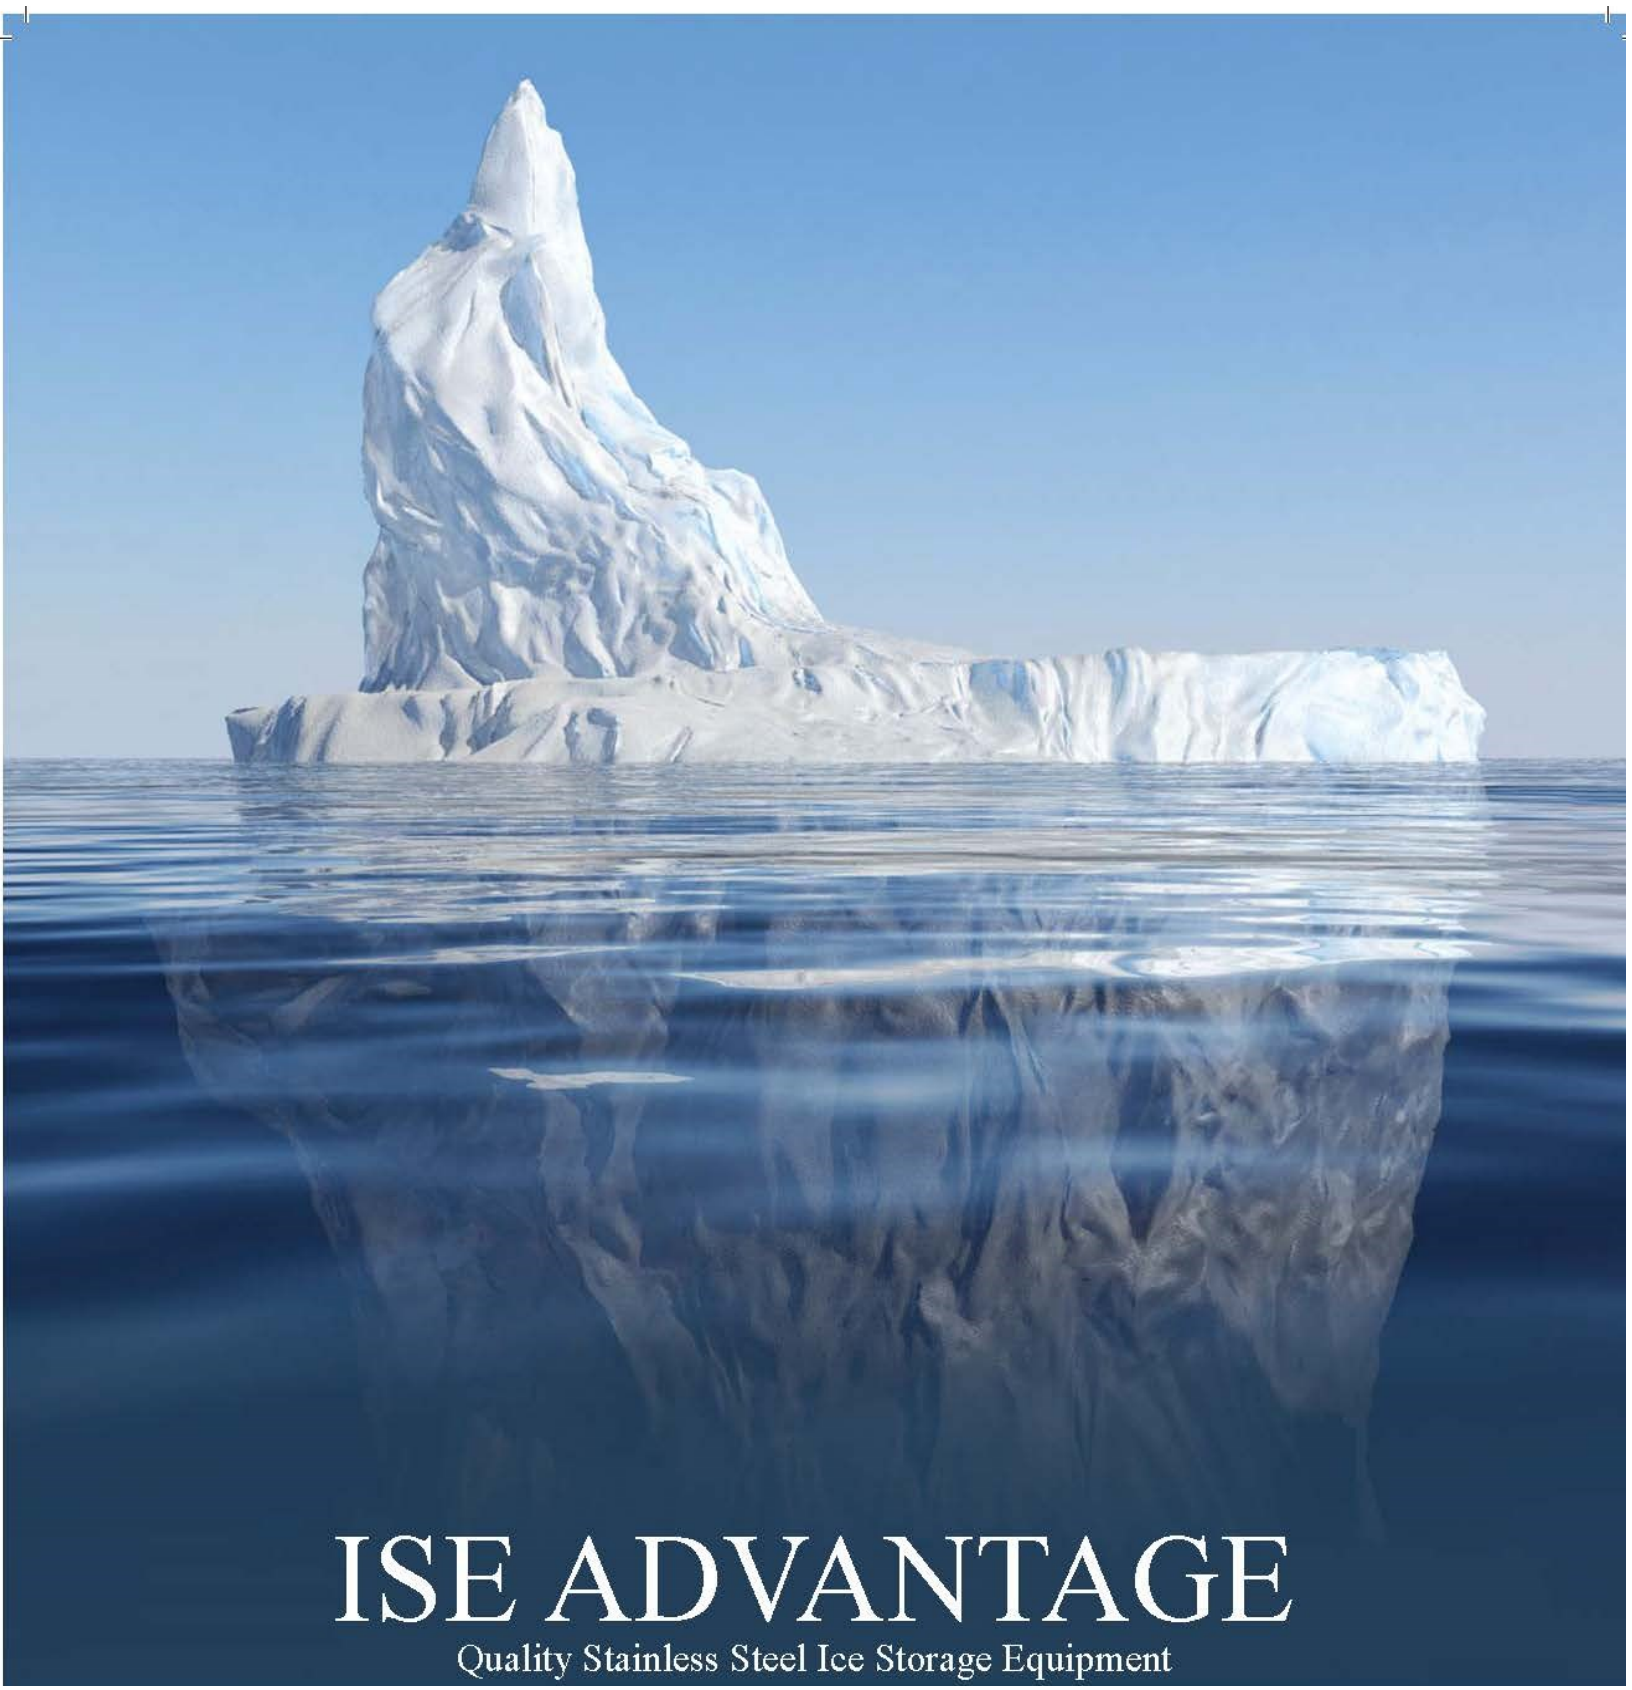

ISE ADVANTAGE

Quality Stainless Steel Ice Storage Equipment

Made in the US

100% Recyclable

KLOPPENBERG

The Kloppenberg Advantage

ISE ADVANTAGE

by Kloppenberg & Co

Quality Stainless Steel Products
Since 1941

Ice Storage Systems

- Uprights
- Shuttle Plus Storage
- Ice Fill Stations
- Ice Storage Dispensers
- Carts

1941 KLOPPENBERG 70th ANNIVERSARY ENGLEWOOD, CO 2011

AQ 360° NSF NAFEM North American Association of Food Equipment Manufacturers

REVISION: C *1/1/2014*

TABLE OF CONTENTS

Technical Product Data

Part 1 - Uprights	1
Part 2 - Shuttle Plus Storage Systems	2
Part 3 - Ice Fill Station	3
Part 4 - Ice Storage Dispensers	4

Uprights

Single Door Units	5
Double Door Units	10
Prison Package Upgrades	15

Shuttle Plus Storage Systems

Shuttle Plus Units	16

Ice Fill Station

Ice Fill Station	19

Ice Storage Dispensers

Ice Storage Dispensers	22

Carts

Carts	25
Accessories	27

Warranty

Limited Lifetime	29
Manufacturer	30

TECHNICAL PRODUCT DATA

Part 1 – Uprights

1.1 GENERAL

A. Height includes 6" adjustable legs and 1" for top closures. Add 10 1/2" to depth after install for snout/door assembly.
B. Poly snouts and sliding view window sets do not require tools to install.
C. Dimensions are shown in inches and pounds.
D. Application capacity is determined as 90% of total volume in cubic feet x 34lb./ cu. ft. avg. ice density. Shipping weights are approximate and variable.

1.2 CLOSURES

A. Equipped with a standard reinforced ABS top that will accommodate any ice maker. Please call for special application requirements.
B. Stainless steel closures are built to match ice maker specifications and included in the price for all stainless steel lined bins (included in 705 and 905 models). Please specify ice maker to be used at time of order.
C. Stainless steel tops are fully gasketed, reinforced and cut to the ice maker of choice.

1.3 ADJUSTABLE FEET

All models equipped with adjustable bullet and/or flanged feet.

1.4 MATERIALS

A. Bins are fabricated from T304 stainless steel sheet, (T316 stainless steel available at additional cost) conforming to ASTM A240. All exposed surfaces are polished to a No. 4 brushed satin finish.
B. SBB models have stainless steel fronts, sides, backs and bottoms.
C. SS models have stainless steel fronts and sides with galvanized steel backs and bottoms.
D. Seamless molded polyethylene liners come with 1 ½" thick foamed-in-place polyurethane insulation.
E. Sliding view windows are ¼" thick polycarbonate.

1.5 PRISON PACKAGE OPTIONS

A. Prison package/Anti-vandalism package (quotes available upon request).
B. Both single and double door units are available with these options; either is available individually or as a package.
   1. 20 gauge stainless steel liner (either seamed or fully welded) (24 ga. standard).
   2. All stainless steel snout with lockable door.
   3. Stainless steel top closure.
   4. 6" stainless steel bolt down flanged legs.
   5. Stainless steel view window cover plate with security screws for authorized removal.

All ice storage bins and shuttle systems are available with a stainless steel liner, fully welded with coved corners. Please call for pricing!

TECHNICAL PRODUCT DATA

Part 2 – Shuttle Plus Storage Systems

2.1 GENERAL

A. Insulated ice storage system with insulated carts for distribution.
B. The model number indicates the number of carts.
C. Capacities shown include cart capacity.
D. Each system includes a 48" ice paddle (60" paddle available).
E. Basic shuttles are shipped fully assembled and shipping weights include carts.
F. SL denotes extended sleeves to increase capacity.
G. Sleeves are shipped separately.
H. G (Giant) denotes a system that is extended 12" in depth for added capacity.
I. Dimensions are shown in inches and pounds.

2.2 CLOSURES

A. Equipped with a standard reinforced top that will accommodate any ice maker. Please call for special application requirements.
B. Stainless steel closures are built to match ice maker specifications and included in the price for all stainless steel lined bins (included in 705 and 905 models). Please specify ice maker to be used at time of order.
C. Stainless steel tops are fully gasketed, reinforced and cut to the ice maker of choice.

2.3 LEG FRAMES AND ADJUSTABLE FEET

A. All models equipped with adjustable bullet and/or flanged leveling feet.
B. All 16 gauge stainless steel 1 ½" square tubing welded leg sets.

2.4 MATERIALS

A. Seamless molded polyethylene liners come with 1 ½" thick foamed-in-place polyurethane insulation on SPS-1, SPS-1G and SPS-2 models only.
B. Sliding view windows are ¼" thick polycarbonate.

2.5 PRISON PACKAGE OPTIONS

A. Prison package/Anti-vandalism package (quotes available upon request).
B. Both single and double door units are available with these options, which are available individually or as a package:
   1. 20 gauge stainless steel liner (either seamed or fully welded) (24 ga. standard).
   2. All stainless steel lockable door(s).
   3. Stainless steel top closure.
   4. 3" stainless steel bolt down flanged legs.

All ice storage bins and shuttle systems are available with a stainless steel liner, fully welded with coved corners. Please call for pricing!

2.6 CARTS

A. Standard carts has a polyethylene shell filled with polyurethane foam insulation
   1. 10” rear casters
   2. 5” front swivel casters
   3. Hinged center to side drop lids
   4. Foot operated rear drain (aligns with catch pan in storage system)
   5. Handles on both ends
B. Classic cart has a stainless steel exterior
   1. Seamless polyethylene liner with polyurethane foam insulation
   2. 5” front swivel casters
   3. 5” rear fixed casters with brake
   4. Rubber corner bumper guards

Part 3 – Ice Fill Station

3.1 GENERAL

A. Height includes leg set and 1” for top closures. Add 10 1/2” to depth after install for snout/door assembly.
B. Poly snouts and sliding view window sets do not require tools to install.
C. Dimensions are shown in inches and pounds.
D. Application capacity is determined as 90% of total volume in cubic feet x 34lb./ cu. ft. avg. ice density. Shipping weights are approximate and variable.
E. Capacities shown include cart capacity.

3.2 CLOSURES

A. Equipped with a standard reinforced ABS top that will accommodate ice maker. Please call for special application requirements.
B. Stainless steel closures are built to match ice manufacturing specification are included in price for all S/S lined bins. Please specify ice maker to be used at time of order.
C. S/S tops are fully gasketed, reinforced and cut to ice maker of choice.

3.3 LEG FRAMES AND ADJUSTABLE FEET

A. All models equipped with adjustable bullet and/or flanged leveling feet.
B. All 16 gauge stainless steel 1 ½” square tubing welded leg sets.

3.4 MATERIALS

A. Cabinets fabricated from T304 stainless steel sheet, (T316 stainless steel available at additional cost) conforming to ASTM A240. All exposed surfaces polished to a No. 4 brushed satin finish.
B. SBB models have stainless steel fronts, sides, backs and bottoms.
C. SS models have stainless steel fronts and sides with galvanized steel backs.
D. Seamless molded polyethylene liners come with 1 ½” thick foamed-in-place urethane insulation.
E. Sliding view windows are ¼” thick polycarbonate.

All ice storage bins and shuttle systems are available with a stainless steel liner, fully welded with coved corners. Please call for pricing!

3.5 PRISON PACKAGE OPTIONS

A. Prison package/Anti-vandalism package (quotes available upon request).
B. Both single and double door units are available with these options, which are available individually or as a package:
   1. 20 gauge stainless steel liner (either seamed or fully welded) (24 ga. standard).
   2. All stainless steel snout with lockable door.
   3. Stainless steel top closure.
   4. 6”stainless steel bolt down flanged legs
   5. Stainless steel view window cover plate with security screws for authorized removal.

Part 4 – Ice Storage Dispensers

4.1 GENERAL

A. Insulated ice bagging systems.
B. Model number indicates storage capacity.
C. Each model includes a 48” ice paddle (60” available).
D. Allow 12” minimum spacing around unit for service.
E. Overall height include 1” for closure.
F. Depth includes bin dimension only (add 15 ½” for chain drive, dispensing chute and bagging shelf).
G. Dimensions are shown in inches and pounds.

4.2 CLOSURES

A. Stainless steel closures built to match ice manufacturing specification are included in price for all S/S lined bins. Please specify ice maker to be used at time of order.
B. S/S tops are fully gasketed, reinforced and cut to ice maker of choice.

4.3 LEG FRAMES AND ADJUSTABLE FEET

A. All models equipped with adjustable bullet and/or flanged leveling feet.
B. All welded leg sets are constructed from 16 gauge stainless steel 1 ½” square tube.

4.4 MATERIALS

A. Seamless molded polyethylene liners comes with 1 ½” foamed-in-place polyurethane insulation on Disp-500 and Disp-1000 models only, poly lined.

All ice storage bins and shuttle systems are available with a stainless steel liner, fully welded with coved corners. Please call for pricing!

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring latch
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved

705

	Single Door Upright				
Model	Capacity	Width	Depth	Height	Weight
705-SS	741lbs	30"	34"	58"	240lbs
705-SBB	741lbs	30"	34"	58"	240lbs

- SBB—Stainless steel front, sides, back and bottom
- SS—Stainless steel front and sides
- Seamless poly liner

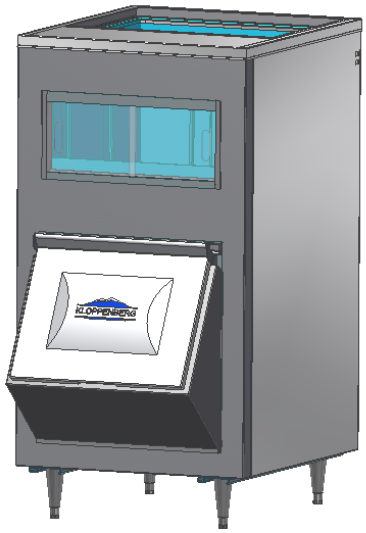

905

	Single Door Upright				
Model	Capacity	Width	Depth	Height	Weight
905-SS	1023lbs	30"	34"	77"	285lbs
905-SBB	1023lbs	30"	34"	77"	285lbs

- SBB—Stainless steel front, sides, back and bottom
- SS—Stainless steel front and sides
- Seamless poly liner

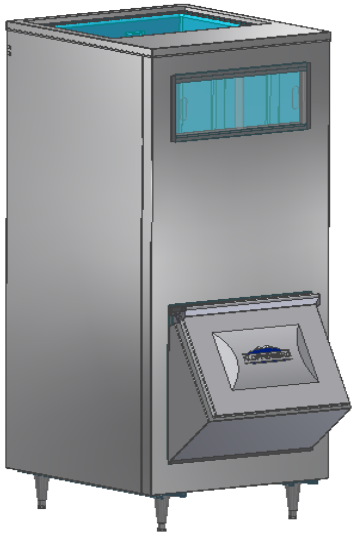

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved

	Single Door Upright				
Model	Capacity	Width	Depth	Height	Weight
965-SBB	1069lbs	36"	34"	67"	295lbs

- SBB—Stainless steel front, sides, back and bottom
- SS—Stainless steel front and sides
- Stainless steel liner

965

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

1045

	Single Door Upright				
Model	Capacity	Width	Depth	Height	Weight
1045-SS	1161lbs	48"	34"	55"	280lbs
1045-SBB	1161lbs	48"	34"	55"	280lbs

- SBB—Stainless steel front, sides, back and bottom
- SS—Stainless steel front and sides
- Seamless poly liner

1315

	Single Door Upright				
Model	Capacity	Width	Depth	Height	Weight
1315-SS	1457lbs	48"	34"	67"	320lbs
1315-SBB	1457lbs	48"	34"	67"	320lbs

- SBB—Stainless steel front, sides, back and bottom
- SS—Stainless steel front and sides
- Seamless poly liner

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

1325

	Single Door Upright				
Model	Capacity	Width	Depth	Height	Weight
1325-SS	1471lbs	60"	34"	55"	310lbs
1325-SBB	1471lbs	60"	34"	55"	310lbs

- SBB—Stainless steel front, sides, back and bottom
- SS—Stainless steel front and sides
- Seamless poly liner

1665

	Single Door Upright				
Model	Capacity	Width	Depth	Height	Weight
1665-SS	1846lbs	60"	34"	67"	370lbs
1665-SBB	1846lbs	60"	34"	67"	370lbs

- SBB—Stainless steel front, sides, back and bottom
- SS—Stainless steel front and sides
- Seamless poly liner

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

1915

	Single Door Upright				
Model	Capacity	Width	Depth	Height	Weight
1915-SBB	2180lbs	60"	48"	56"	400lbs

- All stainless steel
- Sleeves are W x D x 20"H and have a view window
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

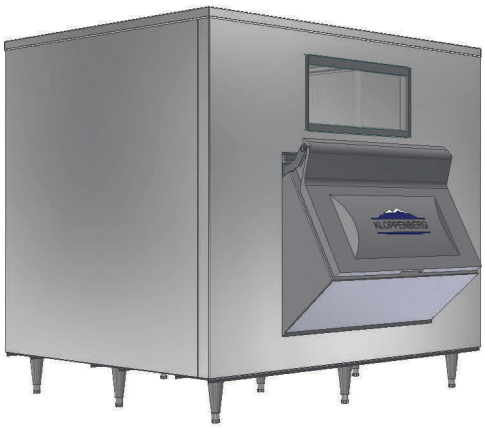

2415

	Single Door Upright				
Model	Capacity	Width	Depth	Height	Weight
2415-SBB	2725lbs	60"	48"	68"	525lbs

- All stainless steel
- Sleeve is W x D x 12"H
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

1455

	Double Door Upright				
Model	Capacity	Width	Depth	Height	Weight
1455	1818lbs	72"	34"	56"	470lbs

- All stainless steel
- Sleeves are W x D x 20"H and have a view window
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

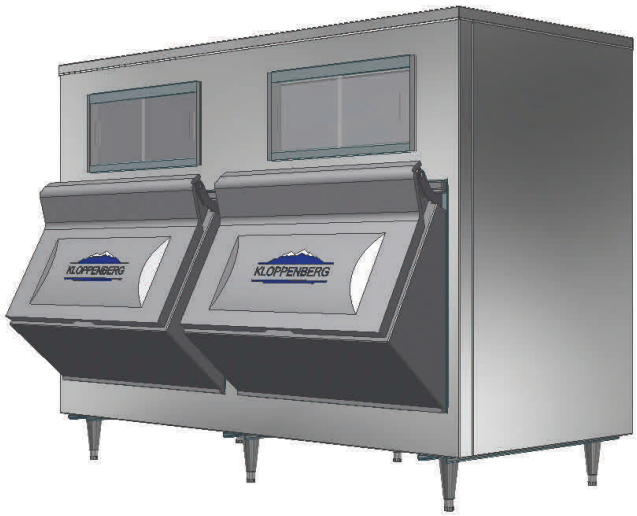

2215

	Double Door Upright				
Model	Capacity	Width	Depth	Height	Weight
2215	2576lbs	72"	34"	76"	625lbs

- All stainless steel
- Sleeves are W x D x 20"H and have a view window
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

2115

	Double Door Upright				
Model	Capacity	Width	Depth	Height	Weight
2115	2639lbs	72"	48"	56"	600lbs

- All stainless steel
- Sleeves are W x D x 20"H and have a view window
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

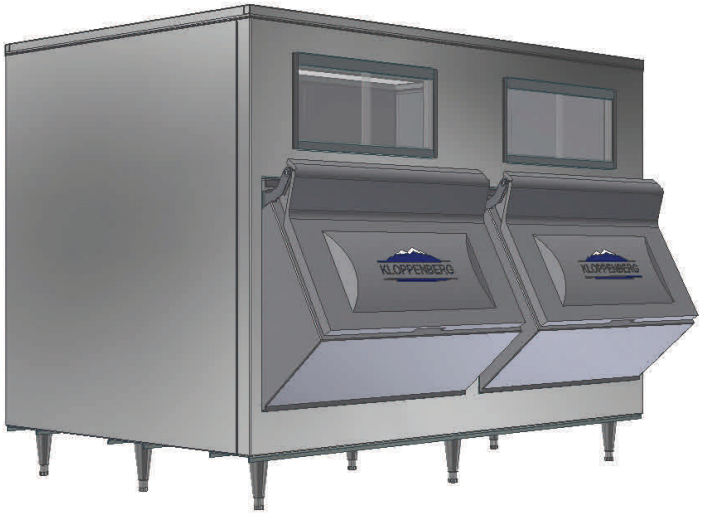

3225

	Double Door Upright				
Model	Capacity	Width	Depth	Height	Weight
3225	3739lbs	72"	48"	76"	785lbs

- All stainless steel
- Sleeves are W x D x 20"H and have a view window
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

	Double Door Upright				
Model	Capacity	Width	Depth	Height	Weight
4325	4839lbs	72"	48"	96"	980lbs

- All stainless steel
- Sleeves are W x D x 20"H and have a view window
- Sleeves can be customized to add height, special doors and more
- Sleeves are shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

4325

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

2845

	Double Door Upright				
Model	Capacity	Width	Depth	Height	Weight
2845	3557lbs	96"	48"	56"	730lbs

- All stainless steel
- Sleeves are W x D x 20"H and have a view window
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

4345

	Double Door Upright				
Model	Capacity	Width	Depth	Height	Weight
4345	5039lbs	96"	48"	76"	1200lbs

- All stainless steel
- Sleeves are W x D x 20"H and have a view window
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

	Double Door Upright				
Model	Capacity	Width	Depth	Height	Weight
5835	6522lbs	96"	48"	96"	1300lbs

- All stainless steel
- Sleeves are W x D x 20"H and have a view window
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

5835

	Single Door Upright—Prison Package				
Model	Capacity	Width	Depth	Height	Weight
705*	741 lbs	30”	34”	58”	240 lbs
905*	1023 lbs	30”	34”	77”	285 lbs
965	1069 lbs	36”	34”	67”	295 lbs
1045*	1161 lbs	48”	34”	55”	280 lbs
1315*	1457 lbs	48”	34”	67”	320 lbs
1325*	1471 lbs	60”	34”	55”	310 lbs
1665*	1846 lbs	60”	34”	67”	370 lbs
1915	2180 lbs	60”	48”	56”	400 lbs
2415	2725 lbs	60”	48”	68”	525 lbs

- *Denotes poly liners. Otherwise stainless steel.
- Sleeves are W x D x 20”H
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

	Double Door Upright—Prison Package				
Model	Capacity	Width	Depth	Height	Weight
1455	1818 lbs	72”	34”	56”	470 lbs
2115	2639 lbs	72”	48”	56”	600 lbs
2215	2576 lbs	72”	34”	76”	625 lbs
2845	3557 lbs	96”	48”	56”	730 lbs
3225	3739 lbs	72”	48”	76”	785 lbs
4325	4839 lbs	72”	48”	96”	980 lbs
4345	5039 lbs	96”	48”	76”	1200 lbs
5835	6522 lbs	96”	48”	96”	1300 lbs

- All stainless steel
- Sleeves are W x D x 20”H
- Sleeves can be customized to add height, special doors and more
- Sleeves may be shipped separate
- Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.

Common Features

- 20 gauge stainless steel liner
  - Seamed or fully welded
- Stainless steel snout with lockable door
- Stainless steel top closure
- 6” stainless steel bolt down flanged legs
- Stainless steel view window cover plate
- Security fasteners for authorized removal

705

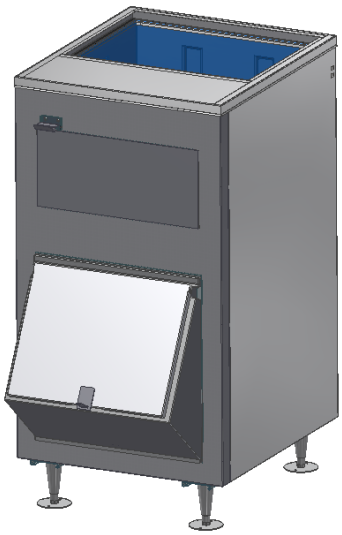

2115

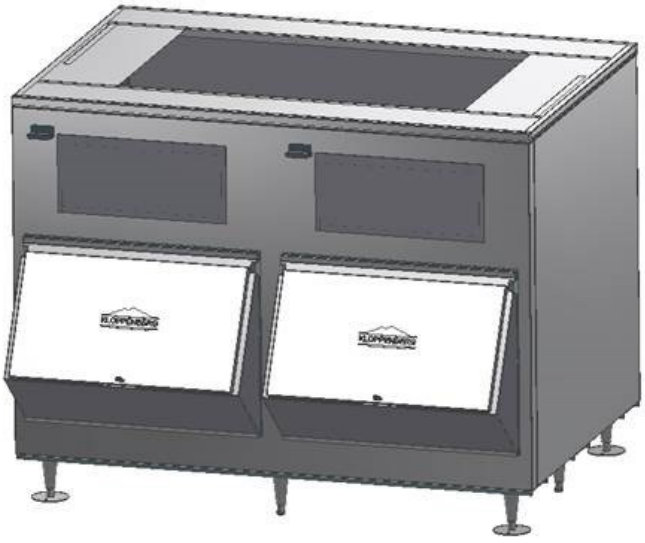

Common Features

- Each shuttle system is shipped with a 48" ice paddle, 60" ice paddle is available
- Standard PCC250 cart(s) are included
- Capacities and crated weights include the cart(s) and are variable
- All Shuttle systems are shipped fully assembled, sleeves may be shipped separately
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

SPS-1

	One Cart Model				
Model	Capacity	Width	Depth	Height	Weight
SPS-1	500lbs	30"	36"	65"	320lbs

- SL denotes extended Sleeve—increases capacity by height ranging from 12" to 30"
- G denotes Giant—increases capacity by adding 12" to the depth of the unit

SPS-1-G

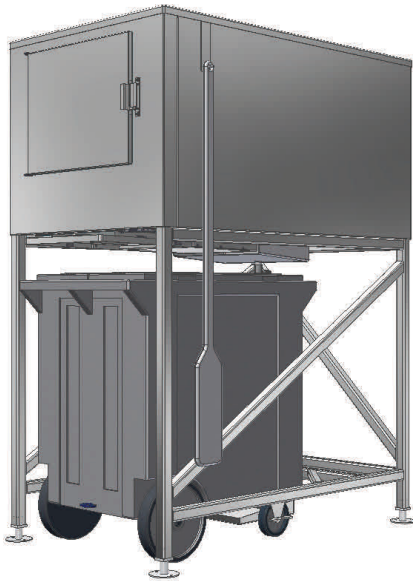

	One Cart Model				
Model	Capacity	Width	Depth	Height	Weight
SPS-1-G	900lbs	30"	48"	82"	370lbs

- SL denotes extended Sleeve—increases capacity by height ranging from 12" to 30"
- G denotes Giant—increases capacity by adding 12" to the depth of the unit

SPS-2-SL



Common Features

- Each shuttle system is shipped with a 48" ice paddle, 60" ice paddle is available
- Standard PCC250 cart(s) are included
- Capacities and crated weights include the cart(s) and are variable
- All Shuttle systems are shipped fully assembled, sleeves may be shipped separately
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

	Two Cart Model				
Model	Capacity	Width	Depth	Height	Weight
SPS-2	1500lbs	60"	36"	71"	530lbs
SPS-2-SL	2500lbs	60"	36"	101"	690lbs
SPS-2 Sleeve Only	1000lbs	60"	36"	30"	180lbs

- SL denotes extended Sleeve—increases capacity by height ranging from 12" to 30"
- G denotes Giant—increases capacity by adding 12" to the depth of the unit

SPS-2

SPS-2 Sleeve

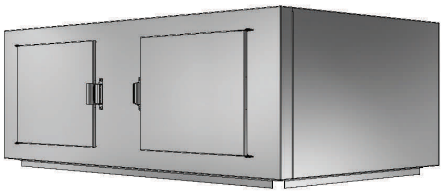

	Two Cart Model				
Model	Capacity	Width	Depth	Height	Weight
SPS-2-G	1800lbs	60"	48"	71"	740lbs
SPS-2-G-SL	3000lbs	60"	48"	101"	960lbs
SPS-2G Sleeve Only	1200lbs	60"	48"	30"	280lbs

- All stainless steel
- SL denotes extended Sleeve—increases capacity by height ranging from 12" to 30"
- G denotes Giant—increases capacity by adding 12" to the depth of the unit

SPS-2-G

SPS-2G Sleeve

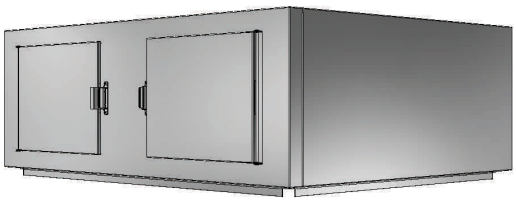

SPS-3-SL

Common Features

- Each shuttle system is shipped with a 48" ice paddle, 60" ice paddle is available
- Standard PCC250 cart(s) are included
- Capacities and crated weights include the cart(s) and are variable
- All Shuttle systems are shipped fully assembled, sleeves may be shipped separately
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

	Three Cart Model				
Model	Capacity	Width	Depth	Height	Weight
SPS-3	2000lbs	90"	36"	71"	950lbs
SPS-3-SL	3400lbs	90"	36"	101"	1190lbs
SPS-3 Sleeve Only	1400lbs	90"	36"	30"	400lbs

- All stainless steel
- SL denotes extended Sleeve—increases capacity by height ranging from 12" to 30"
- G denotes Giant—increases capacity by adding 12" to the depth of the unit

SPS-3

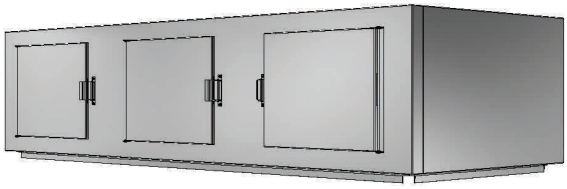

SPS-3

	Three Cart Model				
Model	Capacity	Width	Depth	Height	Weight
SPS-3-G	2400lbs	90"	48"	71"	1100lbs
SPS-3-G-SL	4300lbs	90"	48"	101"	1570lbs
SPS-3G Sleeve Only	1900lbs	90"	48"	30"	500lbs

- All stainless steel
- SL denotes extended Sleeve—increases capacity by height ranging from 12" to 30"
- G denotes Giant—increases capacity by adding 12" to the depth of the unit

SPS-3G Sleeve

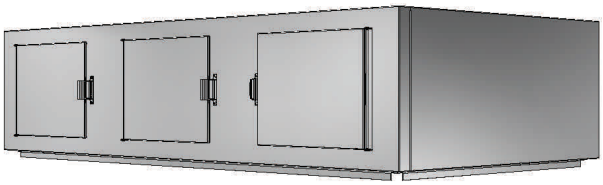

SPS-3-G

Common Features

- Standard cart(s) are included
- Capacities and crated weights include the cart(s) and are variable
- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

36" Ice Fill Station (IFS900-125)

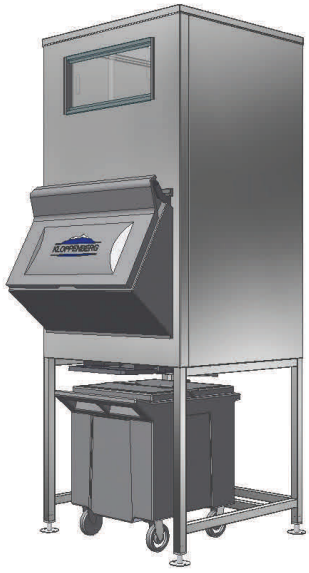

	Single Cart Model				
Model	Capacity	Width	Depth	Height	Weight
IFS900-125	1069lbs	36"	34"	93.5"	360lbs
IFS900-250	1069lbs	36"	34"	101"	380lbs

- Seamless poly liner
- Height includes 32.5" high square tube base on 125's and 41.5" on 250's
- Standard ABS top for 34" deep units
- -125 denotes a PCC125 cart
- -250 denotes a PCC250 cart

48" Ice Fill Station (IFS1000-125)

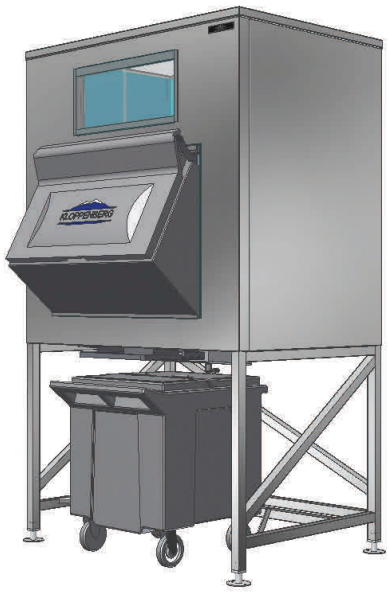

	Single Cart Model				
Model	Capacity	Width	Depth	Height	Weight
IFS1000-125	1161lbs	48"	34"	81.5"	380lbs
IFS1200-125	1457lbs	48"	34"	93.5"	420lbs
IFS1000-250	1161lbs	48"	34"	89"	400lbs
IFS1200-250	1457lbs	48"	34"	101"	440lbs

- Seamless poly liner
- Height includes 32.5" high square tube base on 125's and 41.5" on 250's
- Standard ABS top for 34" deep units
- -125 denotes a PCC125 cart
- -250 denotes a PCC250 cart

Common Features

- Standard cart(s) are included
- Capacities and crated weights include the cart(s) and are variable
- 1 1/2” foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

	Single Cart Model				
Model	Capacity	Width	Depth	Height	Weight
IFS1300-125	1471lbs	60”	34”	81.5”	460lbs
IFS1600-125	1846lbs	60”	34”	93.5”	510lbs
IFS1800-125	2180lbs	60”	48”	82.5”	555lbs
IFS2300-125	2725lbs	60”	48”	94.5”	610lbs
IFS1300-250	1471lbs	60”	34”	89”	480lbs
IFS1600-250	1846lbs	60”	34”	101”	530lbs
IFS1800-250	2180lbs	60”	48”	90”	575lbs
IFS2300-250	2725lbs	60”	48”	102”	630lbs

- Seamless poly liner
- Height includes 32.5” high square tube base on 125’s and 41.5” on 250’s
- Standard ABS top for 34” deep units
- -125 denotes a PCC125 cart
- -250 denotes a PCC250 cart

60” Ice Fill Station (IFS1300-125)

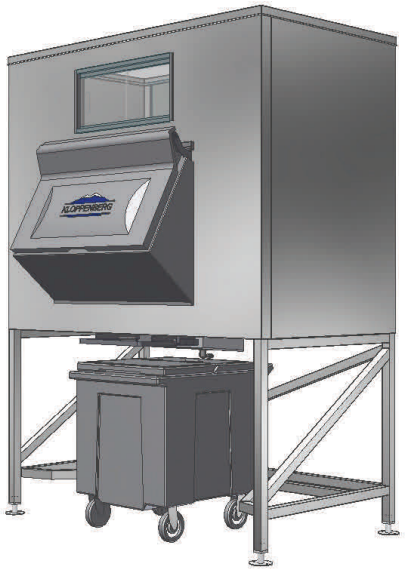

Common Features

- Standard cart(s) are included
- Capacities and crated weights include the cart(s) and are variable
- 1 1/2” foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- Stainless steel baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

	Double Cart Model				
Model	Capacity	Width	Depth	Height	Weight
IFS1700-125	1818lbs	72”	34”	82.5”	665lbs
IFS2400-125	2576lbs	72”	34”	102.5”	775lbs
IFS2500-125	2639lbs	72”	48”	82.5”	780lbs
IFS2700-125	3739lbs	72”	48”	102.5”	920lbs
IFS1700-250	1818lbs	72”	34”	82.5”	685lbs
IFS2400-250	2576lbs	72”	34”	102.5”	875lbs
IFS2500-250	2639lbs	72”	48”	82.5”	800lbs
IFS2700-250	3739lbs	72”	48”	102.5”	940lbs

- Seamless poly liner
- Height includes 32.5” high square tube base on 125’s and 41.5” on 250’s
- Standard ABS top for 34” deep units
- -125 denotes a PCC125 cart
- -250 denotes a PCC250 cart

	Single Cart Model				
Model	Capacity	Width	Depth	Height	Weight
IFS3500-125	3557lbs	96”	48”	82.5”	825lbs
IFS3400-125	5039lbs	96”	48”	102.5”	1260lbs
IFS4800-125	6522lbs	96”	48”	122.5”	1350lbs
IFS3500-250	3557lbs	96”	48”	82.5”	845lbs
IFS3400-250	5039lbs	96”	48”	102.5”	1280lbs
IFS4800-250	6522lbs	96”	48”	122.5”	1370lbs

- Seamless poly liner
- Height includes 32.5” high square tube base on 125’s and 41.5” on 250’s
- Standard ABS top for 34” deep units
- -125 denotes a PCC125 cart
- -250 denotes a PCC250 cart

72” Ice Fill Station (IFS1700-125)

96” Ice Fill Station (IFS3500-125)

Common Features

- Adjustable flanged feet and adjustable casters with break available
- Stainless steel auger/agitator, 1/2hp motor with torque overload/recover, chain driven
- Foot-pedal activated
- Adjustable bag shelf for 8-12 pound bags, easily modified for 20 pound bags
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis.
- Optional timed agitation available, call for quote
- Optional bag blower available, call for quote

Disp-500

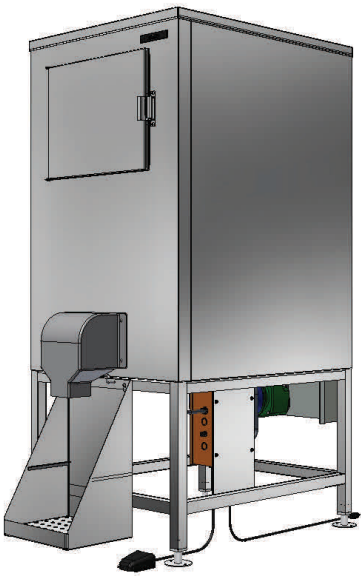

	Ice Storage Dispenser				
Model	Capacity	Width	Depth	Height	Weight
Disp-500	647lbs	30”	36”	71”	510lbs
•Electrical 110V, three prong plug, single phase, 15 amps					
•Add 5 1/2” in back for chain guard					

Disp-1000

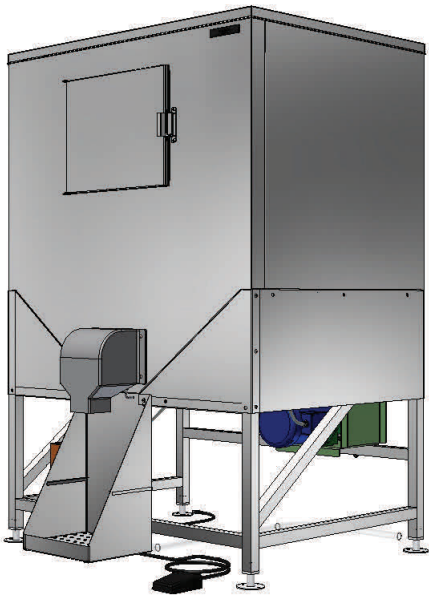

	Ice Storage Dispenser				
Model	Capacity	Width	Depth	Height	Weight
Disp-1000	1078lbs	48”	36”	71”	590lbs
•Electrical 110V, three prong plug, single phase, 15 amps					
•Add 6 1/2” in back for chain guard					

Common Features

- Adjustable flanged feet and adjustable casters with break available
- Stainless steel auger/agitator, 1/2hp motor with torque overload/recover, chain driven
- Foot-pedal activated
- Adjustable bag shelf for 8-12 pound bags, easily modified for 20 pound bags
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis.
- Optional timed agitation available, call for quote
- Optional bag blower available, call for quote

Disp-2000

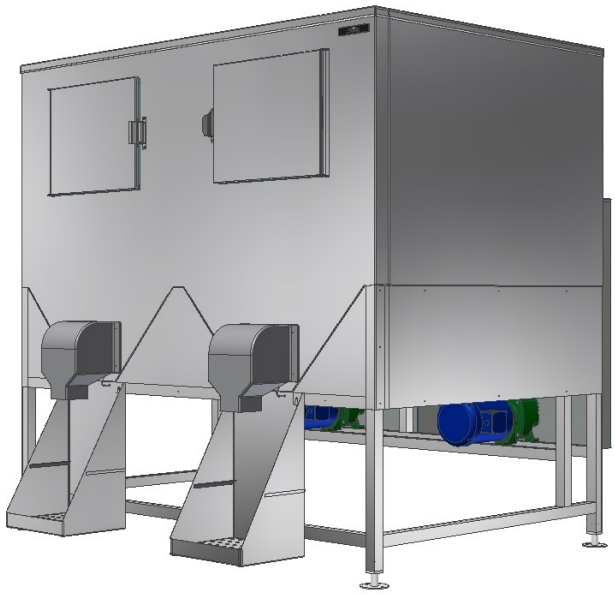

	Ice Storage Dispenser				
Model	Capacity	Width	Depth	Height	Weight
Disp-2000	2254lbs	72”	63.5”	71”	1180lbs
•Electrical 240V, wire leads, single phase, 30 amps					
•Add 6 1/2” in back for chain guard					

Disp-500-IND

Common Features

- One placement for ice & water
- 5 gallon container capacity
- Seamless poly liner
- Adjustable bullet feet (flanged feet and adjustable casters with break available)
- Stainless steel auger/agitator, 1/2hp motor with torque overload/recover, chain driven
- Foot-pedal activated
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis.
- Optional timed agitation available, call for quote
- Optional water filters available, call for quote

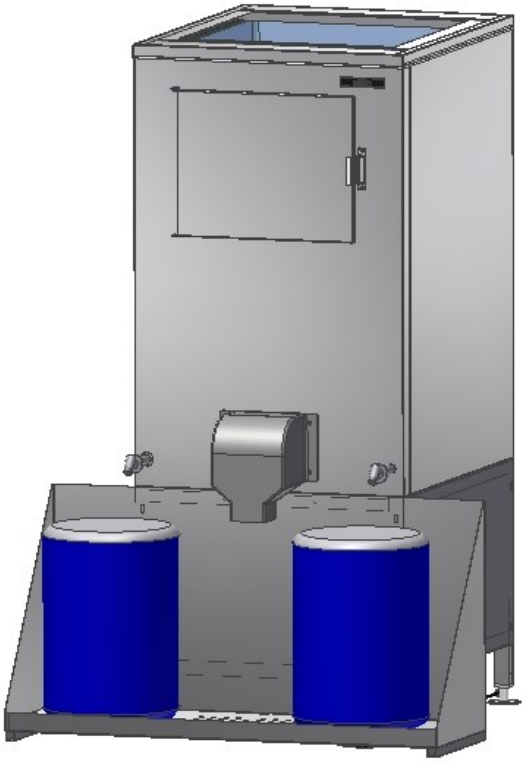

	Ice Storage Dispenser				
Model	Capacity	Width	Depth	Height	Weight
Disp-500-IND	500lbs	31”	57.5”	73.5”	540lbs
•Electrical :110V plug, single phase, 15 amps •Plumbing: 3/8” OD tube inlet connection					
•Add 6 1/2” in back for chain guard					

Common Features

- All poly carts are designed for shuttle bins
- Center split hinged lids open to the cart sides
- Foot operated rear drain
- Handles on both ends of cart
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

PCC-125

	Ice Cart				
Model	Capacity	Width	Depth	Height	Weight
PCC-125	125lbs	22”	29”	29”	75lbs

- Easily maneuvered 5” front and 10” rear castors
- Comes standard with all shuttle systems

PCC-250

	Ice Cart				
Model	Capacity	Width	Depth	Height	Weight
PCC-250	250lbs	22”	30”	38”	100lbs

- Easily maneuvered 5” front and 10” rear castors
- Comes standard with all SPS systems and IFS-250’s

Common Features

- Stainless steel exterior
- Seamless poly-insulated liner
- Center split hinged lids open to the cart sides
- Hand style foot-operated drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

CC-250

	Ice Cart				
Model	Capacity	Width	Depth	Height	Weight
CC-250	250lbs	24”	30”	38”	150lbs
•Rugged 5” Castors, (2) fixed, (2) swivel with brake					

CC-300

	Ice Carts				
Model	Capacity	Width	Depth	Height	Weight
CC-300	300lbs	24”	36”	34”	150lbs
•Rugged 5” Castors, (2) fixed, (2) swivel with brake					

Common Features

- Stainless steel exterior
- Seamless poly-insulated liner
- Center split hinged lids flop to cart side
- Hand style foot-operated drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

	Ice Cart				
Model	Capacity	Width	Depth	Height	Weight
IJC-100	100lbs	21.5”	21”	34”	85lbs
•Rugged 5” Castors, (2) fixed, (2) swivel with brake					

IJC-100





Totes

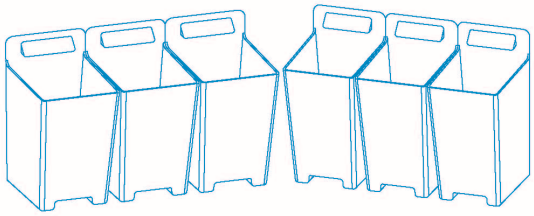

Ice Totes—Optional Cart Accessory
•PCC-125, PCC-250, CC-250, CC-300 models only
•Set of six per cart (Four each for PCC-125)
•Sturdy construction
•Custom fit for shuttle carts

Ice Paddle

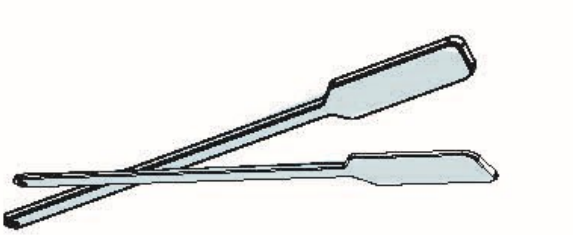

Ice Paddle
•Heavy duty white plastic UHMWP
•48” Long (60” available)
•Compliment of one paddle with every shuttle system and ice bagging system

4080029

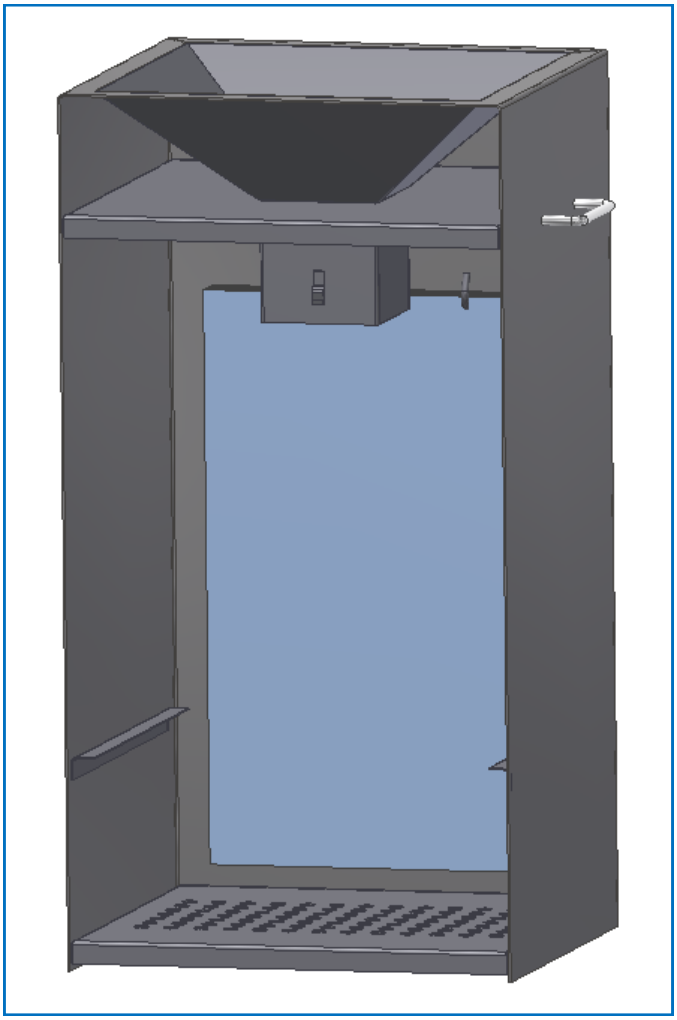

Common Features

- Stainless steel construction
- Up to 20lb bag capacity
- Spring clip to hold bags open
- Twist tie holder
- Adjustable shelf for different size bags
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

	Stand Alone Bagging Kit				
Model	Capacity	Width	Depth	Height	Weight
4080029	20lbs	15”	13.75”	29”	35lbs
•Includes wicket of bags and twist ties					

LIMITED LIFETIME WARRANTY

Kloppenberg warrants to the original purchaser that it will repair or replace at its own cost and discression the following Lifetime product models of its manufacture bearing the name Kloppenberg due to a factory defect in material and/or workmanship exclusive to the polyethylene liner and stainless steel bin cabinet:

UPRIGHT MODELS

1045-SS 1045-SBB 1315-SS 1315-SB 1325-SS 1325-SBB 1665-SS 1665-SBB

ICE SHUTTLE SYSTEM

SPS-1 SPS-1G SPS-2 SPS-2-SL

Kloppenberg Lifetime products must be installed, adjusted and maintained in accordance with the procedures set forth in the Maintenance Instructions and General Conditions provided with each unit to qualify for subject warranty.

Obligations of Kloppenberg are exclusively limited to the original purchaser / registered owner and does not cover purchased parts or extrusions of any kind on any Lifetime Product.

All decisions regarding defects in material, workmanship, accident, alteration, misuse, improper maintenance or installation shall be made by Kloppenberg and Company and shall be final and binding upon both parties.

All claims must submitted directly to Kloppenberg and are exclusively limited to the original purchaser.

Lifetime warranty products must be registered with Kloppenberg within 30 days of invoiced ship date by the owner/end user to include but not limited to unit model number, serial number, original date of installation customer and original purchaser information

Claims for shipments that are damaged are not covered by warranty and must be handles through the carrier.

Kloppenberg assumes no liability for warranted poly liner or cabinet conditions that do not result in an inoperable and unusable state.

The foregoing warranty shall not apply to cosmetic damage, punctures or any outside or internal damage from resulting from foreign objects.

Kloppenberg does not warrant incidental or consequential damages of any kind resulting in whole or in part from misuse or inadequate maintenance of the product or any part thereof.

Kloppenberg assumes no liability for damage of any kind that is a result of alteration or used parts that are not manufactured or approved in writing by Kloppenberg.

This warranty is applicable only in the United States and Canada.

Kloppenberg strongly advises that a pre-determination for any warranty be made by direct contact with Kloppenberg before any service has been called or completed.

MANUFACTURER'S WARRANTY

Kloppenberg warrants to the original purchaser that it will repair or replace at its own cost any commercial ice bin of its manufacture bearing the name Kloppenberg due to a factory defect in material and/or workmanship occurring within the first year from the date of sale for any all-stainless bin and dispenser product. All Kloppenberg products must be installed, adjusted and maintained in accordance with the procedures set forth in the Maintenance Instructions and General Conditions and General Conditions provided with each ice bin and dispenser to qualify for subject warranty.

This warranty does not include parts or labor coverage for a factory component failure or other damage resulting from:

- Improper management of ice production and storage
- Failure to clean and maintain as set forth in the Maintenance Instructions and General Conditions
- Adverse operating conditions
- Drain line malfunctions
- Water content irregularities for any reason

All decisions regarding defects in material, workmanship, accident, alteration, misuse, improper maintenance or installation shall be made by Kloppenberg and Company and shall be final and binding upon the parties. All claims must include the ice bin model number, serial number, and original date of installation and customer identification.

This warranty is applicable only in the United States and Canada. Kloppenberg and Company assumes no liability for incidental or consequential damages of any kind for any damages resulting in whole or in part from misuse or inadequate maintenance of the product or any part thereof.

THE WARRANTY DESCRIBED IN THIS PARAGRAPH SHALL BE IN LIEU OF ANY OTHER WARRANTY EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTIBILITY OR FITNESS FOR A PARTICULAR PUPOSE.

ALL SUBJECT WARRANTY CLAIMS MUST BE PRE-AUTHORIZED

NOTES

NOTES

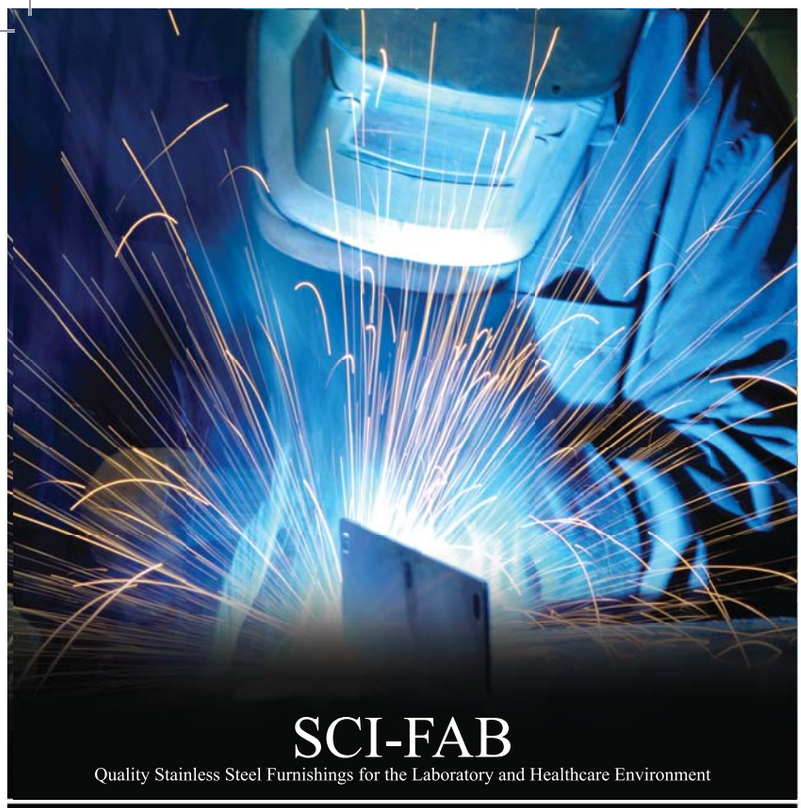

SCI-FAB

Quality Stainless Steel Furnishings for the Laboratory and Healthcare Environment

ISE ADVANTAGE

Quality Stainless Steel Ice Storage Equipment

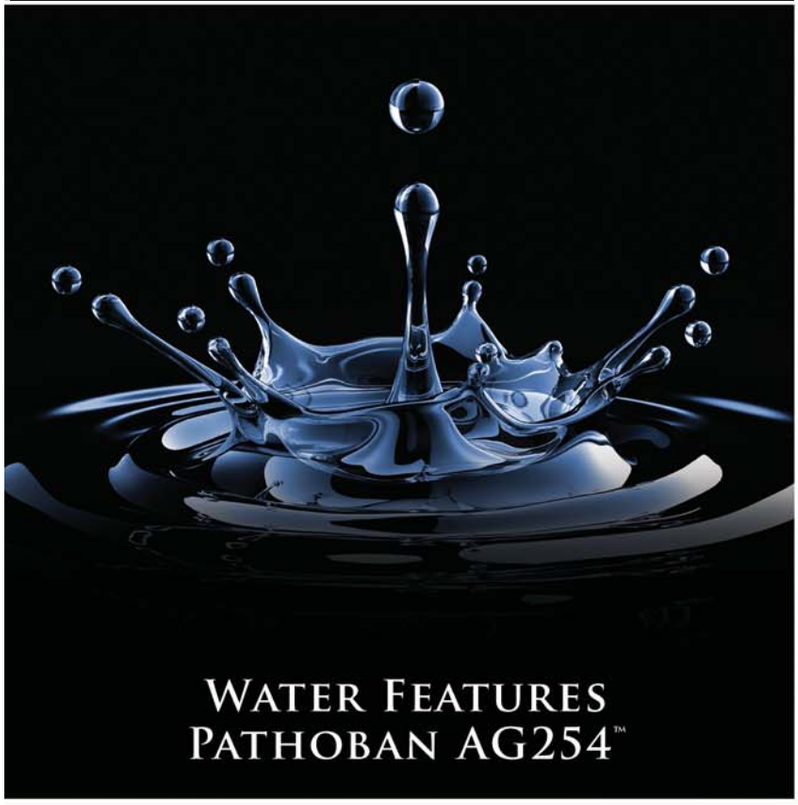

WATER FEATURES
PATHOBAN AG254™

MULTI-FACETED
STAINLESS STEEL FURNITURE

KLOPPENBERG

The Kloppenberg Advantage

www.kloppenberg.com