



Item: _____

Quantity: _____

Project: _____

Infrared Radiant Broiler

Infrared Radiant Broiler

Models: RIB-24 RIB-36 RIB-48 RIB-60



RIB-36

Gas Type: Natural LP

Elevation (if above 2000 ft.): _____

Standard Features

- Full width, removable stainless steel crumb pan for easy cleaning
- Stainless steel sides, front valve cover and ledge
- Easily removable, heavy gauge welded stainless steel radiants protect from spills
- Heavy duty cast iron reversible top grates
- Easily removable independent firebox assembly
- Infrared burners rated at 35,000 BTU/hr each
- Individual burner control
- Standing pilots for instant safe ignition
- Stainless steel tubing for burners and pilots
- 4" high adjustable, heavy duty legs included


Options and Accessories

- Fish grate
 - Diamond grate
 - Stainless steel splash guard tapered to front
 - Stainless Steel Equipment Stand
 - Knock Down All Welded
- Size**
- 24" 36" 48" 60" 72"
 - 5" swivel casters (set of four - 2 locking)
 - 5" swivel casters (set of six - 3 locking) (60" and 72" stands)



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

Infrared Radiant Broiler

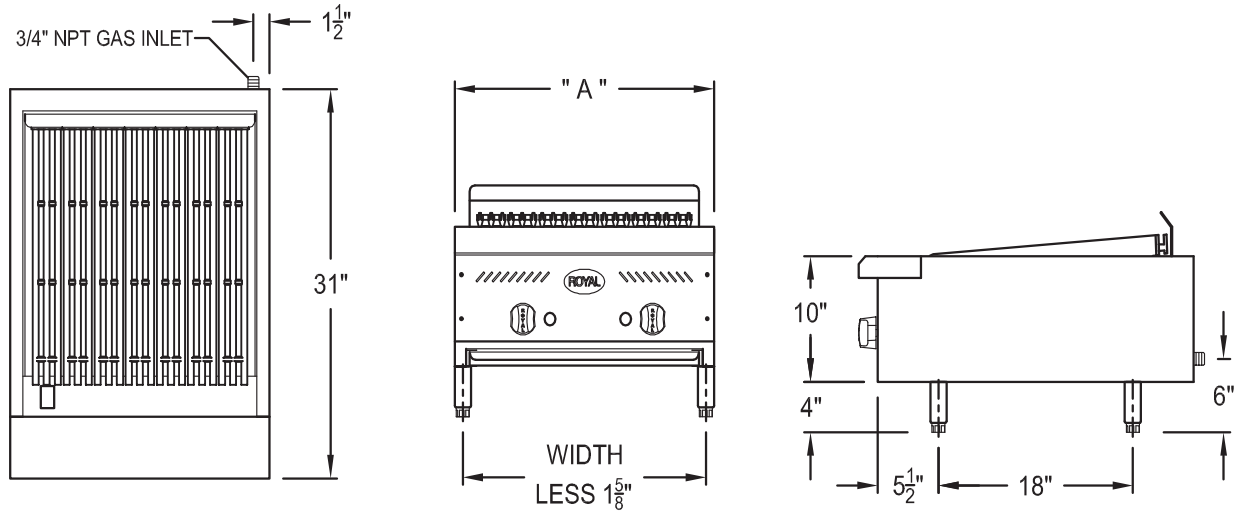

| Model Number | Width (A) | Broiling Grid | Infrared Burners | Total BTU | Ship Weight |
|--------------|-----------|---------------|------------------|-----------|-------------|
| RIB-24 | 24" | 21 1/2" x 20" | 2 | 70,000 | 160 lbs. |
| RIB-36 | 36" | 21 1/2" x 32" | 3 | 105,000 | 204 lbs. |
| RIB-48 | 48" | 21 1/2" x 44" | 4 | 140,000 | 260 lbs. |
| RIB-60 | 60" | 21 1/2" x 56" | 5 | 175,000 | 325 lbs. |

Notes:

- Each burner is rated at 30,000 BTU/hr

Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Gas Pressure:

| | |
|----------|-------------|
| 5" W.C. | Natural Gas |
| 10" W.C. | Propane |

Clearances:

| | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear | 4" | 0" |
| Sides | 15" | 0" |

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com

11/19-R1