



Item: _____

Quantity: _____

Project: _____

Delux Series

Models: ☐ RDSA-24-D ☐ RDSA-36-D ☐ RDSA-48-D ☐ RDSA-60 ☐ RDSA-72-D



RDSA-36-D

Gas Type: ☐ Natural ☐ LP

Elevation (if above 2000 ft.): _____

Standard Features

- 30" deep cooking surface
- Fully welded frame with lifetime warranty
- 1,200°F mineral wool insulation
- 11" working height, perfect for refrigerated bases.
- Large 1½ gallon capacity stainless steel grease can (2 ea on 60" & 72" units)
- Stainless steel sides and front valve cover
- Heavy duty Stainless Steel "U" shaped burner every 12" rated at 30,000 BTU/hr each
- Solid state control with sensor embedded in the plate
- Free standing pilot
- Aeration panels between the burners for added efficiency
- 1" thick griddle plate with polished cooking surface
- 4" wide S/S grease trough with large drain opening for easy cleaning
- Stainless steel tubing for burners and pilots
- 4" high adjustable heavy duty legs included

Options and Accessories


- ☐ Grooved griddle (specify width: _____")
 - ☐ Chrome griddle plate
 - ☐ Belly Bar
 - ☐ Adapter for use on refrigerated base
 - ☐ Piezo Igniter - Manual Spark Ignition
 - ☐ Stainless Steel Equipment Stand
 - ☐ Knock Down ☐ All Welded
- Size
- ☐ 24" ☐ 36" ☐ 48" ☐ 60" ☐ 72"
 - ☐ 5" swivel casters (set of four - 2 locking)
 - ☐ 5" swivel casters (set of six - 3 locking) (60" and 72" models)

30" Deep Solid State Thermostatic Griddle



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

30" Deep Solid State Thermostatic Griddle

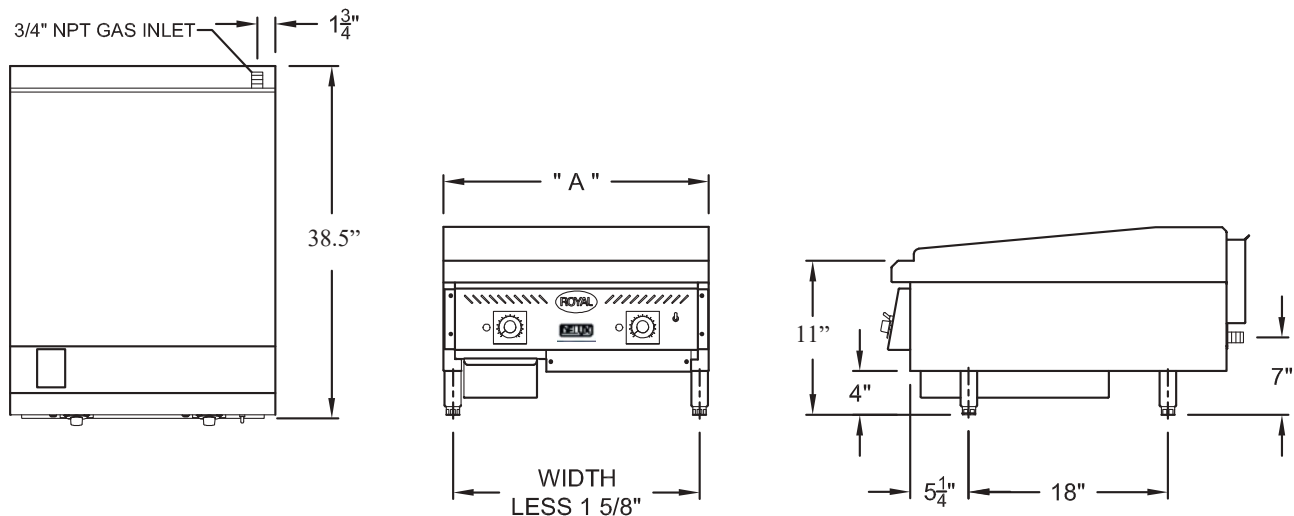

Model Number	Width (A)	Number of Thermostats	Number of Burners	Total BTU	Ship Weight
RDSA-24-D	24"	2	2	60,000	325 lbs.
RDSA-36-D	36"	3	3	90,000	465 lbs.
RDSA-48-D	48"	4	4	120,000	605 lbs.
RDSA-60-D	60"	5	5	150,000	750 lbs.
RDSA-72-D	72"	6	6	180,000	900 lbs.

Notes:

Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Electrical: 120V, 60Hz, 1 phase, 1 amp

Provided with 6' power cord fitted with standard 3 prong grounded plug

Gas Pressure:

5" W.C.	Natural Gas
10" W.C.	Propane

Clearances:

	Combustible	Non-Combustible
Rear	6"	0"
Sides	4"	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.