



Item: \_\_\_\_\_  
 Quantity: \_\_\_\_\_  
 Project: \_\_\_\_\_

## ***Delux Series***

**Models:** ☐ RDSB-24 ☐ RDSB-36 ☐ RDSB-48



*RDSB-36*

Gas Type: ☐ Natural ☐ LP

Elevation (if above 2000 ft.): \_\_\_\_\_

☐ Range Mount ☐ Wall Mount

Range Width: \_\_\_\_\_"  
 (Range width necessary to determine bracket type. Width of salamander cannot exceed range width.)

### **Standard Features**

- Fully welded frame with lifetime warranty
- 1,200°F mineral wool insulation
- Stainless steel interior and exterior
- Full width, removable stainless steel crumb pan for easy cleaning
- Individually adjustable infra-red burners provide powerful radiant heat
- Spring balanced broiler grid moves up and down with positive locking in three positions
- Standing pilots for instant safe ignition
- Easy loading and unloading with a roll-out carriage
- Stainless steel tubing for pilots


### **Options and Accessories**

- ☐ 3/4" gas connection from range to RDSB



**2 YEAR LIMITED, PARTS AND LABOR WARRANTY**

# Salamander Broiler

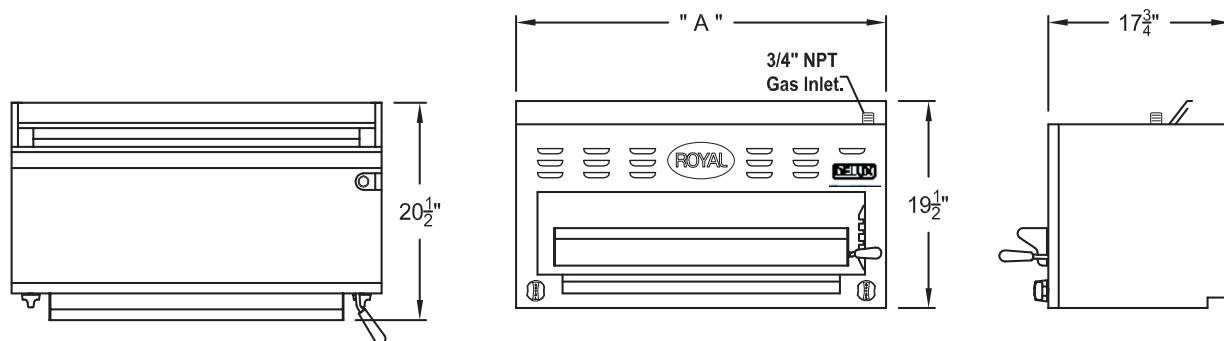

| Model Number | Width (A) | Number of Burners | Total BTU | Ship Weight |
|--------------|-----------|-------------------|-----------|-------------|
| RDSB-24      | 24"       | 1 <sup>1</sup>    | 17,500    | 160 lbs.    |
| RDSB-36      | 36"       | 2 <sup>1</sup>    | 35,000    | 210 lbs.    |
| RDSB-48      | 48"       | 2 <sup>2</sup>    | 40,000    | 252 lbs.    |

## Notes:

1. Infra-red burners rated at 17,500 BTU/hr each.
2. Infra-red burners rated at 20,000 BTU/hr each.

## Gas Connection:

$\frac{3}{4}"$  NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

## Gas Pressure:

|          |             |
|----------|-------------|
| 5" W.C.  | Natural Gas |
| 10" W.C. | Propane     |

## Clearances:

|       | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear  | 4"          | 0"              |
| Sides | 4"          | 0"              |

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.



**Baker** Distributing Company<sup>®</sup>

[www.southernice.com](http://www.southernice.com)

Lafayette, Louisiana- 337-235-5813

New Orleans, Louisiana- 504-734-5024

Little Rock, Arkansas- 501-569-9318

Jackson, Mississippi- 601-923-3332

Phoenix, Arizona- 602-470 2366

Albuquerque, New Mexico- 505-247-0330 Houston, Texas- 713-742-9010