

| Item:     |  |
|-----------|--|
| Quantity: |  |
| Project:  |  |

## Royal Series

Models: ☐ RECOD-1 ☐ RECOD-2



**RECOD-1** with optional casters

## **Standard Features**


- Accommodates full size sheet pans front to back and side to side
- 3 heating elements for a total of 12 KW power
- Electric thermostat adjustable from 150°-500° F
- Two speed motor
- Cool touch controls set back for protection
- Glass window in the right hand door
- Two interior lights
- Oven interior is porcelain coated for easy cleaning
- Doors feature 3 brass bushings per door hinge for perfect door alignment
- Oven doors swing open 135° for easier access for loading and removing pans
- 5 Chrome plated racks standard with 11 positions
- All S/S front, sides, and top construction
- Oven interior useable space: 29" W x 26½" D x 24" H
- Unique stackable design

| Project:   |  |  |  |  |
|--|--|--|--|--|
| •  |  |  |  |  |
|  |  |  |  |  |
| Voltage:   |  |  |  |  |
| <b>□ 208 - 1 Phase □ 208 - 3 Phase</b>   |  |  |  |  |
| <b>□ 240 - 1 Phase □ 240 - 3 Phase</b>   |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
| Options and Accessories  |  |  |  |  |
| ☐ Stainless steel bottom shelf (RECOD-1 Only   |  |  |  |  |
| <ul><li>Stacking kit to stack two single deck units<br/>(includes 6" legs)</li></ul> |  |  |  |  |
| 5" swivel casters (set of four - 2 locking)  |  |  |  |  |
| ☐ Extra oven racks (Qty:)  |  |  |  |  |
| <ul><li>Glass view door for left side (right is standard)</li></ul>                  |  |  |  |  |
| ☐ Pan rack (RECOD-1 Only)  |  |  |  |  |
| ☐ 480 Voltage - 3 Phase  |  |  |  |  |
| ☐ Moisture injection   |  |  |  |  |







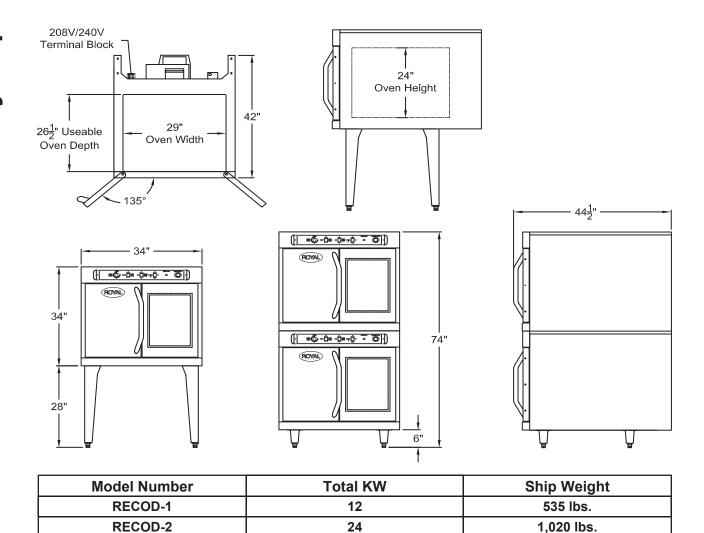

Electrical: Two speed motor (1725/1140 rpm) 230 V, 50/60 Hz,  $\frac{1}{2}$  HP Terminal block for power cord connection with ground lug.

## **Heating Elements:**

| Voltage (V) | Phase | Total KW | Current (Amps)      |
|-------------|-------|----------|---------------------|
| 208         | 1     | 12       | 60                  |
| 208         | 3     | 12       | L1-35, L2-34, L3-34 |
| 240         | 1     | 12       | 50                  |
| 240         | 3     | 12       | L1-30, L2-29, L3-29 |
| 480         | 3     | 12       | L1-16. L2-15. L3-15 |

## Clearances:

|       | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear  | 0"          | 0"              |
| Sides | 0"          | 0"              |

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.



Lafayette, Louisiana- 337-235-5813

New Orleans, Louisiana- 504-734-5024

Little Rock, Arkansas- 501-569-9318

1/21

Jackson, Mississippi- 601-923-3332

Phoenix, Arizona- 602-470 2366