



Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

## Royal Series

Models:  RRE-8     RRE-6GT12     RRE-4GT24     RRE-2GT36     RRE-GT48



Voltage:  208V     240V

Phase:  1 Phase     3 Phase

### Options and Accessories

### Standard Features


- Stainless steel front, sides, control panel and kick plate including backguard and high shelf
- Stainless steel full width drip tray
- Two 20" wide ovens
- Accommodates 18" x 26" full size sheet pan
- Oven with 4 KW heating element
- Oven thermostat controls, 200°-500°F
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior
- 9" solid hot plate elements, 2KW each
- 3/4 thick polished steel griddle plate
- GT Griddle Series - standard with thermostat every 12"

- 6" high S/S stub back in lieu of high shelf
- 1" thick griddle plate
- Griddle on right (Left hand side standard)
- Chrome griddle plate
- Grooved griddle (specify width: \_\_\_\_\_")
- 9" deep S/S front landing ledge, with or without sauce pan cutouts
- One 26½" Convection Oven - add suffix "-126C"  
Cabinet space: Left    Right
- One standard 26½" W Oven - add suffix "-126"  
Cabinet space: Left    Right
- One standard 20" W Oven - add suffix "-120"  
Cabinet space: Left    Right
- Open storage cabinet base - add suffix "-XB"
- Additional oven racks
- Cabinet doors
- Intermediate shelf
- 5" swivel casters (set of four - 2 locking)



**2 YEAR LIMITED, PARTS AND LABOR WARRANTY**

# 48" Electric Restaurant Range

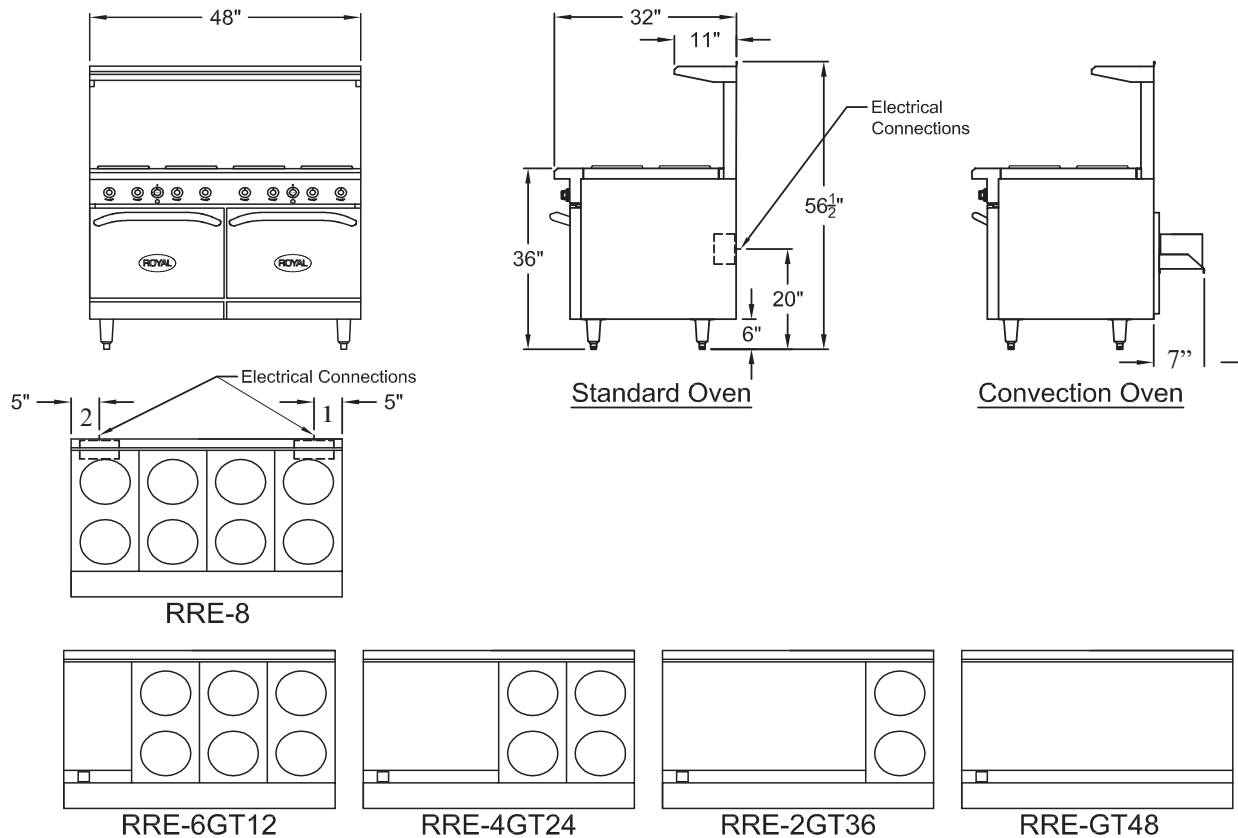

Model	Total KW	Voltage	MAX AMPS				Ship Wt.
			1 Phase		3 Phase		
			Inlet 1	Inlet 2	Inlet 1	Inlet 2	
RRE-8	24	208	58	58	34	34	800
		240	50	50	29	29	
RRE-6GT12	23.4	208	58	55	34	32	820
		240	48	50	29	28	
RRE-4GT24	22.8	208	52	52	34	30	830
		240	48	48	28	28	
RRE-2GT36	22.2	208	55	52	32	30	850
		240	48	45	28	26	
RRE-GT48	21.6	208	52	52	30	30	870
		240	45	45	26	26	

**48" Electric Range units have two electrical connections.**

**To be installed only in noncombustible surroundings. See installation instructions.**

**For convection ovens: add 4 amps plus 75# shipping weight.**

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

