

## Digital Cabinets Reach-In Refrigerator, 72 cu.ft - Stainless Steel

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**738102 (KCBM72RSE-HC)** 3-door reach-in refrigerator, stainless steel, 72 cubic feet, R290 refrigerant gas, 0/+5°C

### Short Form Specification

Item No. \_\_\_\_\_

3-Full door refrigerator with internal structure in 304 AISI stainless steel and external structure in 430 AISI stainless steel.  
Digital control with cabinet temperature display.  
Self-closing doors equipped with lock and key.

R290 gas in the refrigeration circuit.  
ETL Safety and Sanitation certifications.  
3/5 Years warranty.

### Main Features


- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- 3/4 HP Compressor.
- Electronic Digital Temperature Control: quick set digital control and display for easy monitoring.
- External temperature display.
- Heavy duty adjustable, easy to handle and clean shelves.
- Self-closing door with 90-degree stay-open feature.
- Lock & Key protects the contents of the unit.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

### Construction


- Durable and easy to clean for daily commercial use thanks to stainless steel exterior & interior.
- Removable door gasket.
- Heavy duty casters.

APPROVAL: \_\_\_\_\_

**Front**

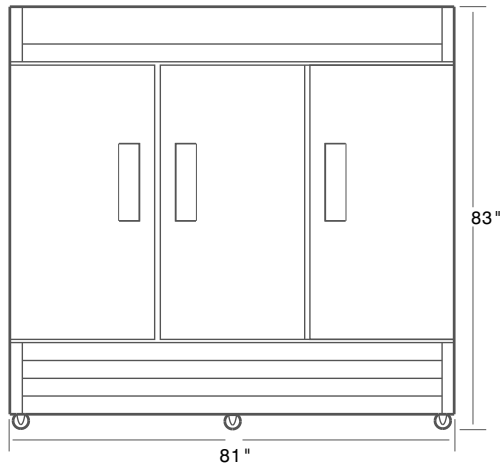


**Side**

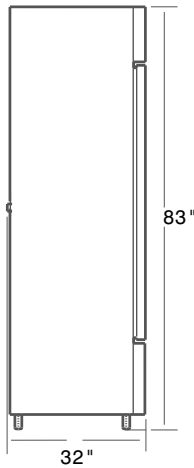

**EI** = Electrical connection  
**RI** = Refrigerant Inlet  
**RO** = Refrigerant Outlet

**Top**

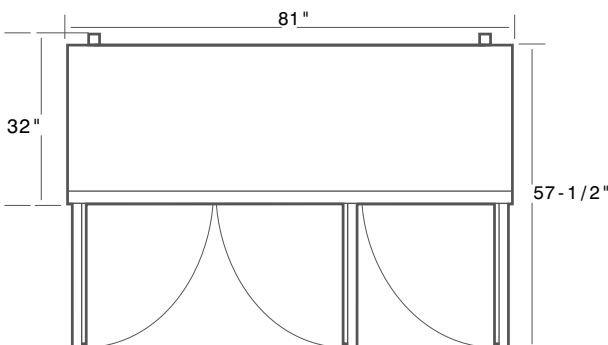

## Electric

<b>Supply voltage:</b>	738102 (KCBM72RSE-HC)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>		1.207 kW
<b>Plug type:</b>		USA NEMA 5-15P

## Key Information:

<b>Capacity (Cu.Ft.)</b>	72.0
<b>Door hinges:</b>	1 Left+2 Right
<b>External dimensions, Width:</b>	81 " (2057.4 mm)
<b>External dimensions, Depth:</b>	32 " (812.8 mm)
<b>External dimensions, Height:</b>	83 " (2108.2 mm)
<b>Number and type of doors:</b>	3 Full
<b>Number and type of grids (included):</b>	9 - Vynil-Coated Steel
<b>Type of external material:</b>	430 AISI
<b>Type of internal material:</b>	304 AISI
<b>Warranty:</b>	3 / 5 years

## Refrigeration Data

<b>Compressor Horsepower:</b>	3/4
<b>Refrigerant type:</b>	R290
<b>Operating temperature min.:</b>	33.01 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

