





REFRIGERATORS AND **FREEZERS**







Model	Doors				
ERB1X-SI	1				
ERB2X-SI	2				
ERB3X-SI	3				
EFB1X-SI	1				
EFB2X-SI	2				
EFB3X-SI	3				

STANDARD FEATURES

- Stainless steel exterior & interior.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C),and freezers -10°F and 0°F (-23°C --18°C).
- Self-Closing doors with 90 degree stay-open feature. Locks and keys included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Preinstalled 4" swivel casters with brakes.
- Removable rear cover makes it easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Incandescent interior lighting, safety shielded.
- Warranty: Two year parts & labor warranty


*Not suitable for installation in a non-commercial or residential applications.

Items	Description	Items	Description
Front, top & sides	Stainless steel	Temperature control	Solid state thermostat/Digital display
Doors	Stainless steel	Approvals	ETL Listed
External back	Aluminum	Refrigerating system	Capillary tube
Cabinet interior	Stainless steel	Refrigerant	R290
Interior floor	Stainless Steel	Temperature range	(R) 33-41F; (F) -10° to 0°F
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper
Shelves	Heavy duty, PVC coating	Condensing unit	Bottom mounted





DETAILS AND DIMENSIONS

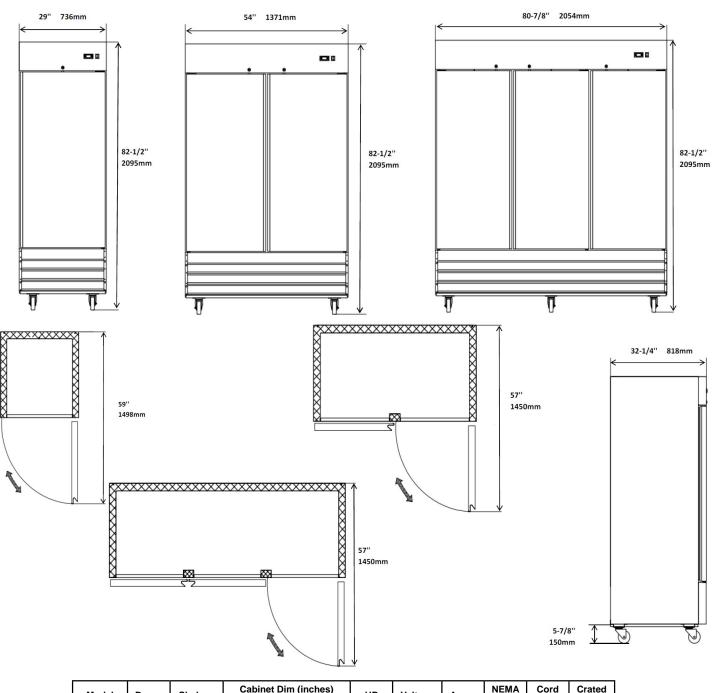

Model	Doors	Shelves	Cabin L	et Dim (in D	ches) H	НР	Voltage	Amps	NEMA Plug	Cord Length	Crated Weight
ERB1X	1	3	29	32.25	82.5	1/5	115/60/1	2.6	5-15P	10	337
ERB2X	2	6	54	32.25	82.5	1/4+	115/60/1	3.8	5-15P	10	513
ERB3X	3	9	80.8	32.25	82.5	3/4	115/60/1	9.0	5-15P	10	704
EFB1X	1	3	29	32.25	82.5	1/2+	115/60/1	7.1	5-15P	10	347
EFB2X	2	6	54	32.25	82.5	1	115/60/1	10.7	5-15P	10	559
EFB3X	3	9	80.875	32.25	82.5	1	115/60/1	13.3	5-20P	10	746

As continued product improvement is a policy of Entree, specifications are subject to change without notice.

FORM #ERFBX Rev 202400607